

- Rated voltage 3V DC
- 2500 F capacitance
- High cycle life of 1 million cycles
- Very high energy and power density
- Laser-weldable terminals
- Environmental-friendly product
- Using activated carbon electrodes



ELECTRICAL SPECIFICATIONS

Type	C60W-3P0-2500
Rated Voltage V_R	3.00 V
Surge Voltage V_S ¹	3.10 V
Rated Capacitance C^2	2500 F
Capacitance Tolerance ³	-0% / +20 %
DC ESR ²	≤0.09 mΩ
Leakage Current I_L ⁴	<12 mA
Self-discharge Rate ⁵	<20 %
Constant Current ($\Delta T = 15^\circ C$) ⁶	230 A
Max Current I_{Max} ⁷	3.75 kA
Short Current I_S ⁸	33.3 kA
Stored Energy E^9	3.13 Wh
Energy Density E_d ¹⁰	6.1 Wh/kg
Usable Power Density P_d ¹¹	23.4 kW/kg
Impedance Match Power Density P_{dMax} ¹²	48.8 kW/kg

THERMAL CHARACTERISTICS

Type	C60W-3P0-2500
Working Temperature	-40 ~ 65°C
Storage Temperature ¹³	-40 ~ 70°C
Thermal Resistance R_{th} ¹⁴	3.14 K/W
Thermal Capacitance C_{th} ¹⁵	598 J/K

LIFETIME CHARACTERISTICS

Type	C60W-3P0-2500
DC Life at High Temperature ¹⁶	1500 hours
DC Life at RT ¹⁷	10 years
Cycle Life ¹⁸	1'000'000 cycles
Shelf Life ¹⁹	4 years

SAFETY & ENVIRONMENTAL SPECIFICATIONS

Type	C60W-3P0-2500
Safety	RoHS, REACH and UL810A
Vibration	IEC 60068-2-64(table A.5/A.6)
Shock	IEC 60068-2-27

Address: nanoCaps AS, Vestfold Innovation Park, Raveien 205, 3184 Borre, Norway


Tel | +47 959 03 989 Web: www.nanocaps.no E-mail: Per.Ohlckers@nanocaps.no

PHYSICAL PARAMETERS

Type	C60W-3P0-2500
Mass, typical M	512 g
Terminals ²⁰	weldable
Dimensions ²¹ L	138 mm
Diameter	60 mm

NOTES:


- Surge voltage V_S : Absolute maximum voltage, non-repetitive. The duration must not exceed 1 second.
- Capacitance C: The test current is 0.12 A/F, if the calculated current is >100A, then apply 100A.

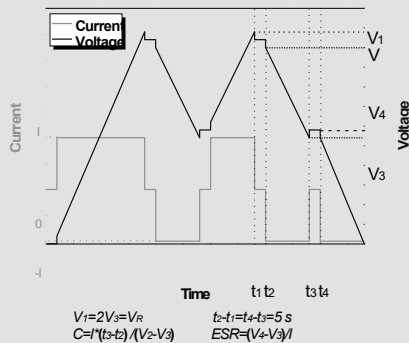

- Capacitance tolerance: Typical 3150 F.
- Leakage current measurement procedure: 1) Charge the capacitor to the V_R with a constant current (0.12 A/F, if the calculated current is >100A, then apply 100A). 2) Hold the voltage at V_R for 72h. 3) The current to maintain V_R after 72 h is the leakage current.
- Self-discharge rate measurement procedure: 1) Charge the capacitor to V_R with a constant current (0.12 A/F, if the calculated current >100A, then apply 100A). 2) Hold the voltage at V_R for 3h. 3) Floating for 72h. 4) Measure the voltage after 72 h.
 $I_{MDC} = 0.5C \cdot V_R / (\Delta t + ESR \cdot C)$
- Max constant working current:
 $I_5 = V_R / ESR$, discharge from V_R to $V_R / 2$ in 1 second.
 $E = 0.5C \cdot V^2 / 3600$
- Short current:
 $E_d = E / M$
- Stored energy:
 $P_d = 0.12V_R^2 / (ESR \cdot M)$
- Energy density:
 $P_{d,max} = 0.25V_R^2 / (ESR \cdot M)$
- Usable power density:
- Impedance match power density:
- Storage temperature: Discharged state (The voltage of cell < 0.2V).

- Thermal resistance: $R_{TK} = 1 / (h \cdot A)$, where $h = 10\text{ W}/(\text{m}^2 \cdot \text{K})$, $A = \text{surface area}$.
- Thermal capacitance: For the whole capacitor
- DC life at high temperature: Hold the capacitor charged at rated voltage at 65°C for 1500h. The capacitance shall be >80% of the rated value, the ESR shall be <200% of rated value.
- DC life at RT: Hold the capacitor charged at rated voltage at room temperature RT, the capacitance shall be >80% of the rated value, the ESR shall be <200% of rated value.
- Cycle life: Charge and discharged the capacitor in the range between V and $V / 2$, 5

seconds between and discharge. constant current is (if the calculated >100A, apply 100A).

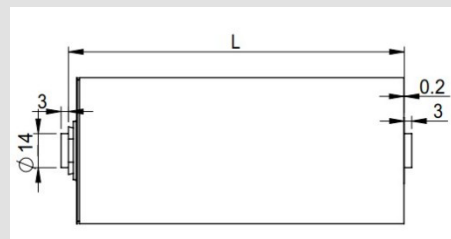

rest charge
The test current then

- Shelf life: Discharged state (The voltage of cell < 0.2V).
- Threaded connection: $\phi 14 \times 3\text{mm}$, the welding depth should be larger than 1.8mm
- Dimensions:
- Standard markings:
 - + Name of manufacturer, part number, serial number
 - + Rated voltage and capacitance, negative and positive terminals, warning marking
 - + Stored energy in watt-hours
- Mounting recommendations:
 - + Mounting without applying undue mechanical stress on the terminals
 - + Provide adequate spacing in between cells to secure required insulation strength
 - + Provide clearance around the safety vent and do not position anything above the safety vent that may be damaged in an event of vent rupture
- The contents of this document are subject to change without notice.